

# Aluminum Quick-Acting Couplings

Agriculture • Chemicals/Petroleum • Construction • Material Handling

## Aluminum Part A Male Adapter x Female NPT

Part Number	Size	Weight Each	Standard Carton
AL-A050	1/2" X 1/2"	0.10	100
AL-A075	3/4"	0.13	50
AL-A100	1"	0.12	70
AL-A125	1 1/4"	0.20	40
AL-A150	1 1/2"	0.28	30
AL-A200	2"	0.38	40
AL-A250	2 1/2"	0.58	50
AL-A300	3"	0.70	35
AL-A400	4"	1.34	20
AL-A500	5"	1.62	4
AL-A600	6"	2.00	15
AL-A800	8"	10.90	2



## Aluminum Part E Male Adapter x Hose Shank

Part Number	Size	Weight Each	Standard Carton
AL-E050	1/2" X 1/2"	0.08	100
AL-E075	3/4"	0.11	50
AL-E100	1"	0.20	50
AL-E125	1 1/4"	0.26	30
AL-E150	1 1/2"	0.38	40
AL-E200	2"	0.60	50
AL-E250	2 1/2"	0.86	20
AL-E300	3"	1.32	18
AL-E400	4"	2.10	20
AL-E500	5"	3.56	4
AL-E600	6"	6.16	6
AL-E800	8"	10.00	2



## Aluminum Part B Female Coupler x Male NPT

AL-B050‡	1/2" X 1/2"	0.18	100
AL-B075●	3/4"	0.24	50
AL-B100●	1"	0.36	30
AL-B125●	1 1/4"	0.62	45
AL-B150●	1 1/2"	0.70	30
AL-B200●	2"	0.86	50
AL-B250●	2 1/2"	1.02	40
AL-B300●	3"	1.56	25
AL-B400●	4"	2.42	25
AL-B500●	5"	3.34	4
AL-B600●	6"	4.98	10



## Aluminum Part F Male Adapter x Male NPT

AL-F050	1/2" X 1/2"	0.14	100
AL-F075	3/4"	0.16	50
AL-F100	1"	0.20	45
AL-F125	1 1/4"	0.34	30
AL-F150	1 1/2"	0.46	50
AL-F200	2"	0.68	60
AL-F250	2 1/2"	0.96	30
AL-F300	3"	1.30	20
AL-F400	4"	2.32	25
AL-F500	5"	2.94	4
AL-F600	6"	3.92	10



## Aluminum Part C Female Coupler x Hose Shank

AL-C050‡	1/2" X 1/2"	0.20	100
AL-C075●	3/4"	0.26	50
AL-C100●	1"	0.42	60
AL-C125●	1 1/4"	0.68	35
AL-C150●	1 1/2"	0.74	30
AL-C200●	2"	0.98	40
AL-C250●	2 1/2"	1.28	30
AL-C300●	3"	2.20	15
AL-C400●	4"	3.16	15
AL-C500●	5"	3.88	4
AL-C600●	6"	7.70	6
†AL-C800●	8"	15.50	1



WITH LOCKING FEATURE



## Aluminum Part DC Dust Cap

AL-DC050‡	1/2" X 1/2"	0.18	100
AL-DC075●	3/4"	0.22	50
AL-DC100●	1"	0.34	40
AL-DC125●	1 1/4"	0.58	25
AL-DC150●	1 1/2"	0.64	40
AL-DC200●	2"	0.80	60
AL-DC250●	2 1/2"	0.94	50
AL-DC300●	3"	1.44	30
AL-DC400●	4"	2.34	15
AL-DC500●	5"	3.06	4
AL-DC600●	6"	4.66	6
AL-DC800●	8"	9.04	4



WITH LOCKING FEATURE



## Aluminum Part D Female Coupler x Female NPT

AL-D050‡	1/2" X 1/2"	0.18	100
AL-D075●	3/4"	0.22	50
AL-D100●	1"	0.42	30
AL-D125●	1 1/4"	0.68	40
AL-D150●	1 1/2"	0.80	30
AL-D200●	2"	0.92	40
AL-D250●	2 1/2"	1.18	35
AL-D300●	3"	1.80	20
AL-D400●	4"	2.82	10
AL-D500●	5"	3.42	4
AL-D600●	6"	5.11	10
†AL-D800●	8"	9.50	2



WITH LOCKING FEATURE



## Aluminum Part DP Dust Plug

AL-DP050	1/2" X 1/2"	0.07	100
AL-DP075	3/4"	0.08	50
AL-DP100	1"	0.10	80
AL-DP125	1 1/4"	0.18	50
AL-DP150	1 1/2"	0.25	50
AL-DP200	2"	0.38	60
AL-DP250	2 1/2"	0.54	40
AL-DP300	3"	0.74	50
AL-DP400	4"	1.22	25
AL-DP500	5"	1.46	4
AL-DP600	6"	2.53	20



Note: Dust Caps & Dust Plugs are **NOT DESIGNED FOR PRESSURE APPLICATIONS.**

● These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.

‡ Size 1/2" x 1/2" supplied with one forged brass handle.

† Supplied with 4 locking handles, safety clips, pull rings and chains.

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.

# Cast Aluminum Compression Quick Couplings & Adapters

For attachment to .065" aluminum tubing for **DRY** pneumatic systems only. Complete with nut and washer.

## Cast Aluminum Compression Quick Couplers — BC

Part Number	Size	Weight Each	Standard Carton
BCAL150	1 1/2"	0.96	25
BCAL200	2"	1.16	20
BCAL250	2 1/2"	1.54	12
BCAL300	3"	2.08	10

WITH LOCKING FEATURE



## Cast Aluminum Compression Adapters — FC

Part Number	Size	Weight Each	Standard Carton
FCAL150	1 1/2"	0.52	25
FCAL200	2"	0.72	20
FCAL250	2 1/2"	1.32	12
FCAL300	3"	1.46	10



NOTE: All Compression Quick Couplers are fully interchangeable with any other adapters made to MIL Specs.

# Petroleum Couplings

Petroleum

## Heavy Duty Aluminum Part C Female Coupler x Hose Shank with Forged Brass Handles

Part Number	Size	Weight Each	Standard Carton
TCC300-A	3"	2.20	15
TCC400-A	4"	3.16	15



## Aluminum Part E Male Adapter x Hose Shank

Part Number	Size	Weight Each	Standard Carton
AL-E200	2"	0.60	50
AL-E300	3"	1.32	18
AL-E400	4"	2.10	20



## Aluminum Vapor Recovery Coupler with Probe with Forged Brass Handles, Coupler x Hose Shank

Part Number	Size	Weight Each	Standard Carton
VRP-A4030	4" X 3"	3.04	4



## API Aluminum Coupler x Adapter



Part Number	Adapter Size	Coupler Size	Weight Each	Standard Carton
TCDA-A4040	4"	4" API	4.50	4

## Aluminum Vapor Recovery Coupler with Probe with Forged Brass Handles, Coupler x Adapter

Part Number	Size	Weight Each	Standard Carton
DAP-4030	4" X 3"	3.54	4



## API Aluminum Coupler x Coupler



Part Number	Adapter Size	Coupler Size	Weight Each	Standard Carton
TCDD-A4040	4"	4" API	6.00	2

## Aluminum Vapor Recovery Coupler with Probe with Forged Brass Handles, Coupler x Female Thread



Part Number	Coupler Size	Female NPT Size	Weight Each	Standard Carton
CGDP-A4030	4"	3"	3.08	4
CGDP-A4040	4"	4"	3.80	4

## API Aluminum Dust Cap



Part Number	Size	Weight Each	Standard Carton
TCDC-A400	4"	3.00	6

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.

# ALSH Aluminum Quick-Acting Couplings

with Stainless Steel Handles, Slot Pins, Safety Clips and Pull Rings

*Agricultural Applications*

## Aluminum Part B Female Coupler x Male NPT with LTW™ Investment-Cast Stainless Steel Locking Handles

Part Number	Size	Weight Each	Standard Carton
ALSH-B100	1"	0.36	25
ALSH-B125	1 1/4"	0.62	20
ALSH-B150	1 1/2"	0.70	12
ALSH-B200	2"	0.86	10
ALSH-B250	2 1/2"	1.02	12
ALSH-B300	3"	1.56	8
ALSH-B400	4"	2.42	12



## Aluminum Part D Female Coupler x Female NPT with LTW™ Investment-Cast Stainless Steel Locking Handles

Part Number	Size	Weight Each	Standard Carton
ALSH-D100	1"	0.42	25
ALSH-D125	1 1/4"	0.68	20
ALSH-D150	1 1/2"	0.80	12
ALSH-D200	2"	0.92	10
ALSH-D250	2 1/2"	1.18	12
ALSH-D300	3"	1.80	10
ALSH-D400	4"	2.82	10



## Aluminum Part C Female Coupler x Hose Shank with LTW™ Investment-Cast Stainless Steel Locking Handles

Part Number	Size	Weight Each	Standard Carton
ALSH-C100	1"	0.42	25
ALSH-C125	1 1/4"	0.68	20
ALSH-C150	1 1/2"	0.74	10
ALSH-C200	2"	0.98	12
ALSH-C250	2 1/2"	1.28	12
ALSH-C300	3"	2.20	5
ALSH-C400	4"	3.16	6



## Aluminum Part DC Dust Cap with LTW™ Investment-Cast Stainless Steel Locking Handles

Part Number	Size	Weight Each	Standard Carton
ALSH-DC100	1"	0.34	25
ALSH-DC125	1 1/4"	0.58	20
ALSH-DC150	1 1/2"	0.64	25
ALSH-DC200	2"	0.80	20
ALSH-DC250	2 1/2"	0.94	12
ALSH-DC300	3"	1.44	8
ALSH-DC400	4"	2.34	6



**Note:** These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.

# Aluminum Swivel Cam & Groove Couplings

## Material Handling

Our specially-designed swivel quick-couplers minimize the torque and twisting that occurs when a hose is in service.

Suggested for 4" ID Tigerflex® 2020, 2001, PF and WU Series hoses.

New SmoothFlow™ tapered throat design provides full flow . . . reduces pressure drop and material build-up in hose.


SureSeal™ Aluminum Collar Clamp (included) provides positive seal . . . eliminates cutting of hose at shank end.

**NOTE:** Swivel Couplings are fully interchangeable with any other adapters made to MIL Specs.

Safety clip provides positive locking.

Investment cast stainless steel LTW™ (Lifetime Warranted) handles with Z-Lok™ patented locking feature.

Stainless steel ball bearings ensure smooth swivel action.

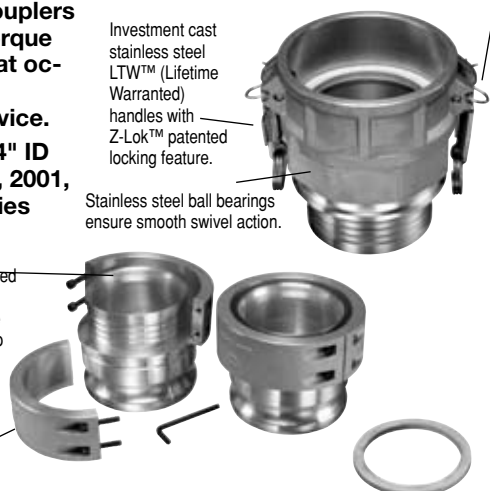

White Nitrile gasket helps prevent product contamination.

## Female Aluminum Swivel Coupler Part "C" with Collar Clamp and White Nitrile (BUNA-N) Gasket

Part Number	Size	Weight Each	Standard Carton
SCAL-C400	4"	5.50	1

## Male Aluminum Adapter Part "E" with Collar Clamp

SCAL-E400	4"	3.20	1
-----------	----	------	---

## SureSeal™ Aluminum Collar Clamp Provided with Allen Wrench and 4 – 1/4-20 Socket Head Cap Screws

AL-SVC400	4"	1.70	1
-----------	----	------	---

## White Nitrile (BUNA-N) Gasket

WNIT400	4"	.660	10
---------	----	------	----

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.

# SS304 Stainless Steel Quick-Acting Couplings

Agriculture • Chemicals/Petroleum

## Stainless Steel Part A Male Adapter x Female NPT

Part Number	Size	Weight Each	Standard Carton
SS304-A050	1/2" X 1/2"	0.20	50
SS304-A075	3/4"	0.26	25
SS304-A100	1"	0.34	25
SS304-A125	1 1/4"	0.62	36
SS304-A150	1 1/2"	0.80	25
SS304-A200	2"	1.12	20
SS304-A250	2 1/2"	1.76	12
SS304-A300	3"	2.16	8
SS304-A400	4"	3.74	6
SS304-A500	5"	4.30	4
SS304-A600	6"	8.55	2



## Stainless Steel Part E Male Adapter x Hose Shank

Part Number	Size	Weight Each	Standard Carton
SS304-E050	1/2" X 1/2"	0.25	50
SS304-E075	3/4"	0.36	25
SS304-E100	1"	0.60	25
SS304-E125	1 1/4"	0.95	25
SS304-E150	1 1/2"	1.22	25
SS304-E200	2"	1.98	20
SS304-E250	2 1/2"	2.64	12
SS304-E300	3"	3.90	8
SS304-E400	4"	6.38	6
SS304-E500	5"	9.10	4
SS304-E600	6"	13.49	2



## Stainless Steel Part B Female Coupler x Male NPT

SS304-B050‡	1/2" X 1/2"	0.30	50
SS304-B075●	3/4"	0.42	25
SS304-B100●	1"	0.64	25
SS304-B125●	1 1/4"	1.32	20
SS304-B150●	1 1/2"	1.50	20
SS304-B200●	2"	1.92	20
SS304-B250●	2 1/2"	2.68	12
SS304-B300●	3"	3.20	8
SS304-B400●	4"	6.58	6
SS304-B500●	5"	6.80	4
SS304-B600●	6"	10.98	2



## Stainless Steel Part F Male Adapter x Male NPT

SS304-F050	1/2" X 1/2"	0.30	50
SS304-F075	3/4"	0.40	25
SS304-F100	1"	0.56	25
SS304-F125	1 1/4"	1.06	25
SS304-F150	1 1/2"	1.28	25
SS304-F200	2"	1.82	20
SS304-F250	2 1/2"	2.68	12
SS304-F300	3"	3.92	8
SS304-F400	4"	6.32	6
SS304-F500	5"	8.60	4
SS304-F600	6"	11.27	2



## Stainless Steel Part C Female Coupler x Hose Shank

SS304-C050‡	1/2" X 1/2"	0.30	50
SS304-C075●	3/4"	0.46	25
SS304-C100●	1"	0.74	25
SS304-C125●	1 1/4"	1.41	20
SS304-C150●	1 1/2"	1.68	20
SS304-C200●	2"	2.30	20
SS304-C250●	2 1/2"	3.10	12
SS304-C300●	3"	4.12	8
SS304-C400●	4"	6.98	6
SS304-C500●	5"	9.60	4
SS304-C600●	6"	14.55	2



## Stainless Steel Part DC Dust Cap

SS304-DC050‡	1/2" X 1/2"	0.25	50
SS304-DC075●	3/4"	0.36	25
SS304-DC100●	1"	0.54	25
SS304-DC125●	1 1/4"	1.30	20
SS304-DC150●	1 1/2"	1.46	25
SS304-DC200●	2"	1.78	20
SS304-DC250●	2 1/2"	2.38	12
SS304-DC300●	3"	3.04	8
SS304-DC400●	4"	5.02	6
SS304-DC500●	5"	6.50	4
SS304-DC600●	6"	9.92	2



## Stainless Steel Part D Female Coupler x Female NPT

SS304-D050‡	1/2" X 1/2"	0.40	50
SS304-D075●	3/4"	0.52	25
SS304-D100●	1"	0.74	25
SS304-D125●	1 1/4"	1.47	20
SS304-D150●	1 1/2"	1.52	25
SS304-D200●	2"	2.16	25
SS304-D250●	2 1/2"	3.12	12
SS304-D300●	3"	3.82	8
SS304-D400●	4"	6.50	6
SS304-D500●	5"	8.00	4
SS304-D600●	6"	11.51	2



## Stainless Steel Part DP Dust Plug

SS304-DP050	1/2" X 1/2"	0.15	50
SS304-DP075	3/4"	0.20	25
SS304-DP100	1"	0.28	25
SS304-DP125	1 1/4"	0.60	25
SS304-DP150	1 1/2"	0.72	25
SS304-DP200	2"	0.96	20
SS304-DP250	2 1/2"	1.47	12
SS304-DP300	3"	1.94	8
SS304-DP400	4"	3.36	6
SS304-DP600	6"	9.08	2



Note: Dust Caps & Dust Plugs are NOT DESIGNED FOR PRESSURE APPLICATIONS.

- These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.
- ‡ Size 1/2" x 1/2" supplied with one sintered stainless steel handle, size 3/4" supplied with two sintered stainless steel handles.

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.

# SS316 Stainless Steel Quick-Acting Couplings

Agriculture • Chemicals/Petroleum

## Stainless Steel Part A Male Adapter x Female NPT

Part Number	Size	Weight Each	Standard Carton
SS-A050	1/2" X 1/2"	0.20	50
SS-A075	3/4"	0.26	25
SS-A100	1"	0.34	25
SS-A125	1 1/4"	0.62	36
SS-A150	1 1/2"	0.80	25
SS-A200	2"	1.12	20
SS-A250	2 1/2"	1.76	12
SS-A300	3"	2.16	8
SS-A400	4"	3.74	6
SS-A500	5"	4.30	4
SS-A600	6"	8.55	2



## Stainless Steel Part E Male Adapter x Hose Shank

Part Number	Size	Weight Each	Standard Carton
SS-E050	1/2" X 1/2"	0.25	50
SS-E075	3/4"	0.36	25
SS-E100	1"	0.60	25
SS-E125	1 1/4"	0.95	25
SS-E150	1 1/2"	1.22	25
SS-E200	2"	1.98	20
SS-E250	2 1/2"	2.64	12
SS-E300	3"	3.90	8
SS-E400	4"	6.38	6
SS-E500	5"	9.10	4
SS-E600	6"	13.49	2



## Stainless Steel Part B Female Coupler x Male NPT

Part Number	Size	Weight Each	Standard Carton
SS-B050‡	1/2" X 1/2"	0.30	50
SS-B075●	3/4"	0.42	25
SS-B100●	1"	0.64	25
SS-B125●	1 1/4"	1.32	20
SS-B150●	1 1/2"	1.50	20
SS-B200●	2"	1.92	20
SS-B250●	2 1/2"	2.68	12
SS-B300●	3"	3.20	8
SS-B400●	4"	6.58	6
SS-B500●	5"	6.80	4
SS-B600●	6"	10.98	2



## Stainless Steel Part F Male Adapter x Male NPT

Part Number	Size	Weight Each	Standard Carton
SS-F050	1/2" X 1/2"	0.30	50
SS-F075	3/4"	0.40	25
SS-F100	1"	0.56	25
SS-F125	1 1/4"	1.06	25
SS-F150	1 1/2"	1.28	25
SS-F200	2"	1.82	20
SS-F250	2 1/2"	2.68	12
SS-F300	3"	3.92	8
SS-F400	4"	6.32	6
SS-F500	5"	8.60	4
SS-F600	6"	11.27	2



## Stainless Steel Part C Female Coupler x Hose Shank

Part Number	Size	Weight Each	Standard Carton
SS-C050‡	1/2" X 1/2"	0.30	50
SS-C075●	3/4"	0.46	25
SS-C100●	1"	0.74	25
SS-C125●	1 1/4"	1.41	20
SS-C150●	1 1/2"	1.68	20
SS-C200●	2"	2.30	20
SS-C250●	2 1/2"	3.10	12
SS-C300●	3"	4.12	8
SS-C400●	4"	6.98	6
SS-C500●	5"	9.60	4
SS-C600●	6"	14.55	2



## Stainless Steel Part DC Dust Cap

Part Number	Size	Weight Each	Standard Carton
SS-DC050‡	1/2" X 1/2"	0.25	50
SS-DC075●	3/4"	0.36	25
SS-DC100●	1"	0.54	25
SS-DC125●	1 1/4"	1.30	20
SS-DC150●	1 1/2"	1.46	25
SS-DC200●	2"	1.78	20
SS-DC250●	2 1/2"	2.38	12
SS-DC300●	3"	3.04	8
SS-DC400●	4"	5.02	6
SS-DC500●	5"	6.50	4
SS-DC600●	6"	9.92	2



## Stainless Steel Part D Female Coupler x Female NPT

Part Number	Size	Weight Each	Standard Carton
SS-D050‡	1/2" X 1/2"	0.40	50
SS-D075●	3/4"	0.52	25
SS-D100●	1"	0.74	25
SS-D125●	1 1/4"	1.47	20
SS-D150●	1 1/2"	1.52	25
SS-D200●	2"	2.16	25
SS-D250●	2 1/2"	3.12	12
SS-D300●	3"	3.82	8
SS-D400●	4"	6.50	6
SS-D500●	5"	8.00	4
SS-D600●	6"	11.51	2



## Stainless Steel Part DP Dust Plug

Part Number	Size	Weight Each	Standard Carton
SS-DP050	1/2" X 1/2"	0.15	50
SS-DP075	3/4"	0.20	25
SS-DP100	1"	0.28	25
SS-DP125	1 1/4"	0.60	25
SS-DP150	1 1/2"	0.72	25
SS-DP200	2"	0.96	20
SS-DP250	2 1/2"	1.47	12
SS-DP300	3"	1.94	8
SS-DP400	4"	3.36	6
SS-DP600	6"	9.08	2



Note: Dust Caps & Dust Plugs are **NOT DESIGNED FOR PRESSURE APPLICATIONS.**

- These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.
- ‡ Size 1/2" x 1/2" supplied with one sintered stainless steel handle, size 3/4" supplied with two sintered stainless steel handles.

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.

# K-Loc™ Auto Lock SS316 Quick-Acting Couplings

Agriculture • Chemicals/Petroleum

WITH LTW (LIFETIME WARRANTED) INVESTMENT-CAST SS LOCKING HANDLES



**K-Loc™ Auto Lock SS316  
Part B Quick-Acting Coupler**

Part Number	Size	Weight Each	Standard Carton
KLOC-SS-B150●	1½"	1.57	20
KLOC-SS-B200●	2"	2.09	16
KLOC-SS-B300●	3"	3.63	4



**K-Loc™ Auto Lock SS316  
Part DC Dust Cap**

Part Number	Size	Weight Each	Standard Carton
KLOC-SS-DC150●	1½"	1.49	20
KLOC-SS-DC200●	2"	1.89	18
KLOC-SS-DC300●	3"	3.33	8



**K-Loc™ Auto Lock SS316  
Part C Quick-Acting Coupler**

Part Number	Size	Weight Each	Standard Carton
KLOC-SS-C150●	1½"	1.87	15
KLOC-SS-C200●	2"	2.80	10
KLOC-SS-C300●	3"	5.22	5

**K-Loc™ Auto Lock SS  
Investment-Cast LTW™  
Replacement Handles‡,  
SS Slot Pins, SS Safety Clips  
& SS Pull Rings**



Part Number	Size
K-LOCSSHA200	1½" & 2"
K-LOCSSHA300	3" & 4"



**K-Loc™ Auto Lock SS316  
Part D Quick-Acting Coupler**

Part Number	Size	Weight Each	Standard Carton
KLOC-SS-D150●	1½"	1.74	20
KLOC-SS-D200●	2"	2.26	16
KLOC-SS-D300●	3"	3.85	4

‡ Note: If a K-Loc™ Auto Lock handle breaks, it can be replaced with a standard LTW™ Investment-Cast SS handle to make the coupling functional. Although the K-Loc™ Auto Lock locking feature would no longer be present, locking can still be accomplished by inserting a safety clip through the holes provided.

● These couplers are supplied with special K-Loc™ Auto Lock LTW locking handles.


See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.


# Brass Quick-Acting Couplings

Chemicals/Petroleum • Construction


## Brass Part A Male Adapter x Female NPT

	Part Number	Size	Weight Each	Standard Carton
	BR-A050	1/2" X 1/2"	0.15	50
	BR-A075	3/4"	0.24	25
	BR-A100	1"	0.34	25
	BR-A125	1 1/4"	0.73	36
	BR-A150	1 1/2"	0.66	25
	BR-A200	2"	0.86	20
	BR-A250	2 1/2"	1.61	12
	BR-A300	3"	1.72	8
	BR-A400	4"	3.41	6
	BR-A500	5"	4.85	4
	BR-A600	6"	7.27	2


## Brass Part E Male Adapter x Hose Shank

	Part Number	Size	Weight Each	Standard Carton
	BR-E050	1/2" X 1/2"	0.24	50
	BR-E075	3/4"	0.36	25
	BR-E100	1"	0.59	25
	BR-E125	1 1/4"	0.75	25
	BR-E150	1 1/2"	1.01	25
	BR-E200	2"	1.54	20
	BR-E250	2 1/2"	2.11	12
	BR-E300	3"	3.08	8
	BR-E400	4"	4.30	6
	BR-E500	5"	7.60	4
	BR-E600	6"	12.33	2


## Brass Part B Female Coupler x Male NPT

	Part Number	Size	Weight Each	Standard Carton
	BR-B050‡	1/2" X 1/2"	0.36	50
	BR-B075●	3/4"	0.44	25
	BR-B100●	1"	0.66	25
	BR-B125●	1 1/4"	1.19	20
	BR-B150●	1 1/2"	1.21	20
	BR-B200●	2"	1.39	20
	BR-B250●	2 1/2"	1.87	12
	BR-B300●	3"	4.36	8
	BR-B400●	4"	4.19	6
	BR-B500●	5"	5.18	4
	BR-B600●	6"	8.15	2


## Brass Part F Male Adapter x Male NPT

	Part Number	Size	Weight Each	Standard Carton
	BR-F050	1/2" X 1/2"	0.22	50
	BR-F075	3/4"	0.33	25
	BR-F100	1"	0.53	25
	BR-F125	1 1/4"	0.66	25
	BR-F150	1 1/2"	0.88	25
	BR-F200	2"	1.08	20
	BR-F250	2 1/2"	1.85	12
	BR-F300	3"	2.42	8
	BR-F400	4"	3.74	6
	BR-F500	5"	4.63	4
	BR-F600	6"	9.03	2


## Brass Part C Female Coupler x Hose Shank

	Part Number	Size	Weight Each	Standard Carton
	BR-C050‡	1/2" X 1/2"	0.35	50
	BR-C075●	3/4"	0.53	25
	BR-C100●	1"	0.81	25
	BR-C125●	1 1/4"	1.23	20
	BR-C150●	1 1/2"	1.32	20
	BR-C200●	2"	1.72	20
	BR-C250●	2 1/2"	2.42	12
	BR-C300●	3"	3.74	8
	BR-C400●	4"	5.51	6
	BR-C500●	5"	7.27	4
	BR-C600	6"	13.77	2


## Brass Part DC Dust Cap

	Part Number	Size	Weight Each	Standard Carton
	BR-DC075●	3/4"	0.42	50
	BR-DC100●	1"	0.66	25
	BR-DC125●	1 1/4"	0.95	20
	BR-DC150●	1 1/2"	1.04	25
	BR-DC200●	2"	1.32	20
	BR-DC250●	2 1/2"	2.05	12
	BR-DC300●	3"	2.20	8
	BR-DC400●	4"	3.96	6
	BR-DC500●	5"	4.74	4
	BR-DC600●	6"	8.59	2

## Brass Part D Female Coupler x Female NPT

	Part Number	Size	Weight Each	Standard Carton
	BR-D050‡	1/2" X 1/2"	0.35	50
	BR-D075●	3/4"	0.51	25
	BR-D100●	1"	0.75	25
	BR-D125●	1 1/4"	1.12	20
	BR-D150●	1 1/2"	1.21	25
	BR-D200●	2"	1.43	25
	BR-D250●	2 1/2"	1.87	12
	BR-D300●	3"	3.13	8
	BR-D400●	4"	5.29	6
	BR-D500●	5"	5.62	4
	BR-D600	6"	10.95	2

## Brass Part DP Dust Plug

	Part Number	Size	Weight Each	Standard Carton
	BR-DP075	3/4"	0.22	50
	BR-DP100	1"	0.33	25
	BR-DP125	1 1/4"	0.46	25
	BR-DP150	1 1/2"	0.53	25
	BR-DP200	2"	0.99	20
	BR-DP250	2 1/2"	0.99	12
	BR-DP300	3"	1.65	8
	BR-DP400	4"	2.42	6
	BR-DP500	5"	3.74	4
	BR-DP600	6"	4.74	2

**Note: Dust Caps & Dust Plugs are NOT DESIGNED FOR PRESSURE APPLICATIONS.**

● These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.

‡ Size 1/2" x 1/2" supplied with one forged brass handle.


See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.


# Reducing Coupler/Adapters, Spool Adapters, Flange Adapter & Coupler, Coupler X Coupler

Chemicals/Petroleum


## Aluminum Reducing Coupler/Adapter — Part D x A with Forged Brass Handles

	Part Number	Size	Weight Each	Standard Carton
	RDA-A2030	2" X 3"	1.64	12
	RDA-A3020	3" X 2"	2.37	6
	RDA-A3040	3" X 4"	2.60	6
	RDA-A4020	4" X 2"	2.70	6
	RDA-A4030	4" X 3"	2.96	6
	RDA-A6040	6" X 4"	6.66	2


## Aluminum Spool Adapters

	Part Number	Size	Weight Each	Standard Carton
	SA-A150	1 1/2" X 1 1/2"	0.43	50
	SA-A200	2" X 2"	0.68	40
	SA-A2030	2" X 3"	0.97	12
	SA-A300	3" X 3"	1.10	12
	SA-A3040	3" X 4"	1.78	8
	SA-A400	4" X 4"	1.91	6


## Brass Reducing Coupler/Adapter — Part D x A with Forged Brass Handles

	RDA-B2030	2" X 3"	2.86	6
	RDA-B3020	3" X 2"	6.12	6
	RDA-B4020	4" X 2"	7.07	6
	RDA-B4030	4" X 3"	9.42	6


## Brass Spool Adapters

	SA-B150	1 1/2" X 1 1/2"	1.35	50
	SA-B200	2" X 2"	2.11	40
	SA-B250	2 1/2" X 2 1/2"	3.55	30
	SA-B300	3" X 3"	3.69	20
	SA-B400	4" X 4"	5.97	6


## Stainless Steel Reducing Coupler/Adapter – Part D x A with LTW (Lifetime Warranted) Investment-Cast SS Locking Handles

	RDA-SS3020	3" X 2"	4.08	6
	RDA-SS4030	4" X 3"	6.41	4
	RDA-SS6040	6" X 4"	12.10	2


## Stainless Steel Spool Adapters

	SA-SS150	1 1/2" X 1 1/2"	1.76	18
	SA-SS1520	1 1/2" X 2"	2.10	20
	SA-SS200	2" X 2"	2.48	20
	SA-SS2030	2" X 3"	3.14	10
	SA-SS300	3" X 3"	4.61	10
	SA-SS3040	3" X 4"	5.28	6
	SA-SS400	4" X 4"	7.28	6


## Aluminum Adapter X 150# ASA Flange Drilling

	FL-AL-A300	3"	3.86	4
	FL-AL-A400	4"	5.86	3
	FL-AL-A600	6"	9.92	2


## Aluminum Coupler X 150# ASA Flange Drilling

	FL-AL-D300	3"	5.07	3
	FL-AL-D400	4"	7.94	2
	FL-AL-D600	6"	12.89	1

## Aluminum DD Coupler X Coupler with Forged Brass Handles and Carbon Steel Safety Clips

	DD-AL200	2" X 2"	1.43	12
	DD-AL300	3" X 3"	2.40	6
	DD-AL400	4" X 4"	3.90	5

## Stainless Steel DD Coupler X Coupler with LTW (Lifetime Warranted) Investment-Cast SS Locking Handles and SS Safety Clips

	DD-SS150	1 1/2" X 1 1/2"	2.10	20
	DD-SS200	2" X 2"	2.89	12
	DD-SS300	3" X 3"	5.11	6
	DD-SS400	4" X 4"	6.66	5

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.



# Polypropylene Quick-Acting Couplings

Agriculture • Construction

## Polypropylene Part A Male Adapter x Female NPT

Part Number	Size	Weight Each	Standard Carton
PPA050	1/2" X 1/2"	0.04	200
PPA075	3/4"	0.05	50
PPA100	1"	0.05	70
PPA125	1 1/4" X 1 1/4"	0.10	40
PPA150	1 1/2"	0.14	30
PPA200	2"	0.19	40
PPA300	3"	0.48	35
PPA400	4"	1.02	20



## Polypropylene Part D Female Coupler x Female NPT

Part Number	Size	Weight Each	Standard Carton
PPD050	1/2" X 1/2"	0.18	100
PPD075	3/4"	0.19	50
PPD100	1"	0.25	30
PPD125	1 1/4" X 1 1/4"	0.41	40
PPD150	1 1/2"	0.53	30
PPD200	2"	0.55	40
PPD300	3"	1.17	20
PPD400	4"	1.58	10



## Polypropylene Part B Female Coupler x Male NPT

Part Number	Size	Weight Each	Standard Carton
PPB050	1/2" X 1/2"	0.17	50
PPB075	3/4"	0.18	50
PPB100	1"	0.26	30
PPB125	1 1/4" X 1 1/4"	0.40	45
PPB150	1 1/2"	0.49	30
PPB200	2"	0.47	50
PPB300	3"	1.17	25
PPB400	4"	1.44	25



## Polypropylene Part E Male Adapter x Hose Shank

Part Number	Size	Weight Each	Standard Carton
PPE050	1/2" X 1/2"	0.03	200
PPE075	3/4"	0.06	50
PPE100	1"	0.08	50
PPE125	1 1/4" X 1 1/4"	0.15	30
PPE150	1 1/2"	0.17	40
PPE200	2"	0.30	50
PPE300	3"	0.76	18
PPE400	4"	1.00	20



## Polypropylene Part C Female Coupler x Hose Shank

Part Number	Size	Weight Each	Standard Carton
PPC050	1/2" X 1/2"	0.17	100
PPC075	3/4"	0.19	50
PPC100	1"	0.27	60
PPC125	1 1/4" X 1 1/4"	0.40	35
PPC150	1 1/2"	0.51	30
PPC200	2"	0.61	40
PPC300	3"	1.28	15
PPC400	4"	1.70	15



## Polypropylene Part F Male Adapter x Male NPT

Part Number	Size	Weight Each	Standard Carton
PPF050	1/2" X 1/2"	0.04	200
PPF075	3/4"	0.06	50
PPF100	1"	0.11	45
PPF125	1 1/4" X 1 1/4"	0.15	30
PPF150	1 1/2"	0.18	50
PPF200	2"	0.29	60
PPF300	3"	0.56	20
PPF400	4"	0.81	25



- These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.
- ‡ All 4" couplers are supplied with **THREE** locking handles to provide additional stability and prevent wobbling.
- These couplers are supplied with 2 sintered stainless steel handles.

**NOTE: All parts on this page are fully interchangeable with any other adapters made to MIL Specs. 1/2" X 1/2" are not specified under MIL Specs.**

**See Material Specifications & Operating Pressure Chart on Page 39**

**All prices and specifications subject to change without notice.**

# Polypropylene Quick-Acting Couplings *(continued)*

Agriculture • Construction

## Polypropylene Part DC Dust Cap

Part Number	Size	Weight Each	Standard Carton
PPDC050■	1/2"	0.16	100
PPDC075●■	3/4"	0.17	50
PPDC100●	1"	0.24	40
PPDC125●	1 1/4"	0.42	25
PPDC150●	1 1/2"	0.47	40
PPDC200●	2"	0.50	60
PPDC300●	3"	1.11	30
PPDC400●‡	4"	1.06	15



WITH LOCKING FEATURE

## Polypropylene Part DP Dust Plug

Part Number	Size	Weight Each	Standard Carton
PPDP050	1/2"	0.02	200
PPDP075	3/4"	0.03	50
PPDP100	1"	0.04	80
PPDP125	1 1/4"	0.06	50
PPDP150	1 1/2"	0.10	50
PPDP200	2"	0.15	60
PPDP300	3"	0.36	50
PPDP400	4"	0.50	25



**Note: Dust Caps & Dust Plugs are NOT DESIGNED FOR PRESSURE APPLICATIONS.**

## Polypropylene 90° Male Adapter x Female NPT

Part Number	Size	Weight Each	Standard Carton
PP150A90	1 1/2"	0.23	24
PP200A90	2"	0.36	24



## Polypropylene 90° Female Coupler x Hose Shank

Part Number	Size	Weight Each	Standard Carton
PP150C90●	1 1/2"	0.56	24
PP200C90●	2"	0.73	24



## Polypropylene 90° Female Coupler x Female NPT

Part Number	Size	Weight Each	Standard Carton
PP150D90●	1 1/2"	0.65	24
PP200D90●	2"	0.78	24



## Polypropylene 90° Male Adapter x Male NPT

Part Number	Size	Weight Each	Standard Carton
PP150F90	1 1/2"	0.27	24
PP200F90	2"	0.41	24



## Polypropylene Combination Hose Nipples — PPN Series / NPT Thread

Part Number	Size	Weight Each	Standard Carton
PPN050	1/2"	0.03	400
PPN075	3/4"	0.06	200
PPN100	1"	0.07	100
PPN125	1 1/4"	0.11	80
PPN150	1 1/2"	0.13	60
PPN200	2"	0.22	40
PPN300	3"	0.55	12



- These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.
- ‡ All 4" couplers are supplied with **THREE** locking handles to provide additional stability and prevent wobbling.
- These couplers are supplied with 2 sintered stainless steel handles.

**NOTE: All parts on this page are fully interchangeable with any other adapters made to MIL Specs. 1/2" X 1/2" are not specified under MIL Specs.**


**See Material Specifications & Operating Pressure Chart on Page 39**

**All prices and specifications subject to change without notice.**


# Glass Reinforced Nylon Quick-Acting Couplings

Agriculture • Construction


## Glass Reinforced Nylon Part A Male Adapter x Female NPT

	Part Number	Size	Weight Each	Standard Carton
	GRA100	1"	0.16	70
	GRA150	1 1/2"	0.18	30
	GRA200	2"	0.26	40
	GRA300	3"	0.46	35
	GRA400	4"	0.92	20

## Glass Reinforced Nylon Part F Male Adapter x Male NPT


	Part Number	Size	Weight Each	Standard Carton
	GRF100	1"	0.10	45
	GRF150	1 1/2"	0.18	50
	GRF200	2"	0.28	60
	GRF300	3"	0.66	20
	GRF400	4"	0.90	25

## Glass Reinforced Nylon Part B Female Coupler x Male NPT

	Part Number	Size	Weight Each	Standard Carton
	GRB100●	1"	0.16	30
	GRB150●	1 1/2"	0.46	30
	GRB200●	2"	0.52	50
	GRB300●	3"	1.02	25
	GRB400●■	4"	1.34	25


WITH LOCKING FEATURE

## Glass Reinforced Nylon Part DC Dust Cap

	Part Number	Size	Weight Each	Standard Carton
	GRDC100●	1"	0.16	40
	GRDC150●	1 1/2"	0.46	40
	GRDC200●	2"	0.50	60
	GRDC300●	3"	0.96	30
	GRDC400●■	4"	1.16	15


WITH LOCKING FEATURE

## Glass Reinforced Nylon Part C Female Coupler x Hose Shank


	Part Number	Size	Weight Each	Standard Carton
	GRC100●	1"	0.18	60
	GRC150●	1 1/2"	0.50	30
	GRC200●	2"	0.58	40
	GRC300●	3"	1.24	15
	GRC400●■	4"	1.60	15

WITH LOCKING FEATURE

## Glass Reinforced Nylon Part DP Dust Plug

	Part Number	Size	Weight Each	Standard Carton
	GRDP100	1"	0.06	80
	GRDP150	1 1/2"	0.12	50
	GRDP200	2"	0.20	60
	GRDP300	3"	0.36	50
	GRDP400	4"	0.60	25


## Glass Reinforced Nylon Part D Female Coupler x Female NPT

	Part Number	Size	Weight Each	Standard Carton
	GRD100●	1"	0.18	30
	GRD150●	1 1/2"	0.50	30
	GRD200●	2"	0.58	40
	GRD300●	3"	1.04	20
	GRD400●■	4"	1.48	10


WITH LOCKING FEATURE

**Note: Dust Caps & Dust Plugs are NOT DESIGNED FOR PRESSURE APPLICATIONS.**

## Glass Reinforced Nylon Combination Hose Nipples — GRN Series / NPT Thread

	Part Number	Size	Weight Each	Standard Carton
	GRN050	1/2"	0.02	400
	GRN075	3/4"	0.04	200
	GRN100	1"	0.06	100
	GRN125	1 1/4"	0.08	80
	GRN150	1 1/2"	0.12	60
	GRN200	2"	0.22	40
	GRN300	3"	0.54	12
	GRN400	4"	0.80	12

## Glass Reinforced Nylon Part E Male Adapter x Hose Shank

	Part Number	Size	Weight Each	Standard Carton
	GRE100	1"	0.02	50
	GRE150	1 1/2"	0.18	40
	GRE200	2"	0.28	50
	GRE300	3"	0.66	18
	GRE400	4"	1.04	20

GRN Series

● These couplers are supplied with locking feature . . . safety clips may be inserted to lock handles, preventing disconnection during product transfer.

■ All 4" couplers are supplied with **THREE** locking handles to provide additional stability and prevent wobbling.

NOTE: All parts on this page are fully interchangeable with any other adapters made to MIL Specs.

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.

# Gaskets - EPDM & Buna-N


Replacement EPDM Gaskets†  
for Quick-Acting Aluminum  
SS, Polypropylene and Glass  
Reinforced Nylon Couplings



Part Number	Size	Weight Each	Standard Pkg†
EPDM100	1"	.010	10
EPDM125	1¼"	.016	10
EPDM150	1½"	.018	10
EPDM200	2"	.022	10
EPDM250	2½"	.034	10
EPDM300	3"	.042	10
EPDM400	4"	.066	10

† Sold in full standard packages only

Replacement Buna-N Gaskets†  
for Aluminum, Brass, 316  
Stainless and K-Loc™ Couplings



Part Number	Size	Weight Each	Standard Pkg†
BUNA075	¾"	.008	10
BUNA100	1"	.010	10
BUNA125	1¼"	.016	10
BUNA150	1½"	.018	10
BUNA200	2"	.022	10
BUNA250	2½"	.034	10
BUNA300	3"	.042	10
BUNA400	4"	.066	10
BUNA500	5"	.094	10
BUNA600	6"	.116	10
BUNA800	8"	.220	10

† Sold in full standard packages only

# Replacement Handles & Safety Clips

Forged Brass  
Replacement Handles—  
with Stainless Steel Slot Pins,  
SS Pull Rings and SS  
Safety Clips



Part Number	Size
HA BRASS075	½" – ¾"
HA BRASS100	1"
HA BRASS200	1¼" – 2½"
HA BRASS300	3" – 5"
HA BRASS600	6" – 8"

Investment Cast SS LTW\*  
Replacement Handles with  
SS Slot Pins, SS Pull Rings  
and SS Safety Clips



Part Number	Size
HA ST-STL100	1"
HA ST-STL200	1¼" – 2½"
HA ST-STL300	3" – 5"
HA ST-STL600	6" – 8"

Sintered PM SS  
Replacement Handles—  
with SS Slot Pins & SS  
Pull Rings



Part Number	Size
HA ST-STL075	½" – ¾"

Safety Clips —  
304 Stainless Steel  
For Use On All Types of  
Quick-Acting Hose Couplings



Part Number	Size	Weight Each	Standard Pkg†
SCSS-200	¾" – 5"	.25	10
SCSS-600	6 – 8"	.40	10

\* Lifetime Warranty on handles only.

See Material Specifications & Operating Pressure Chart on Page 39

All prices and specifications subject to change without notice.